


## Transportní oko se závitem

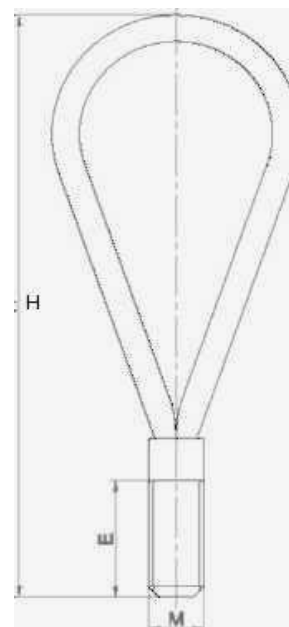

Závit $\emptyset$	nosnost kg	zatížení kg	Rozměry v mm			hmotnost kg/ks
			E	H	Lano $\emptyset$	
M10		400	22	120	5**	0,06
M12	900	500	22	130	6	0,06
M14	1400	800	25	150	7	0,1
M16	1700	1200	27	170	8	0,13
M20	3100	2000	35	210	10	0,26
M24	3900	2500	43	260	12	0,43
M27	4900	3000	48	280	13	0,67
M30	5000	4000	56	340	16	1,05
M36	7900	6300	68	380	18	1,52
M42	10200	8000	80	420	20	2,18
M52	17500	12500	97	550	26	4,75

Standardní závit pro betonové prefabrikáty	Nosnost v Kg	Rozměry v mm			hmotnost kg/ks
		E	H	Lano $\emptyset$	
RD 12 x 1,75	500	22	130	6	0,06
RD 14 x 2,00	800	25	150	7	0,1
RD 16 x 2,00	1200	27	170	8	0,13
RD 18 x 2,50	1600	34	190	9	0,19
RD 20 x 2,50	2000	35	210	10	0,26
RD 24 x 3,00	2500	43	260	12	0,43
RD 30 x 3,50	4000	56	340	16	1,05
RD 36 x 4,00	6300	68	380	18	1,52
RD 42 x 4,50	8000	80	420	20	2,18
RD 52 x 5,00	12500	97	550	26	4,75